

EN-41 Vintage Violet 18-3410 TPG



EN-74 11-0601 TPG  
Bright White



EN-01 11-4202 TPG  
Star White



EN-02 11-4300 TPG  
Marshmallow



EN-03 11-0103 TPG  
Egret




EN-04 12-4300 TPG  
White Onyx



EN-05 13-0404 TPG  
Ancient Scroll



EN-06 12-4301 TPG  
Almond Milk

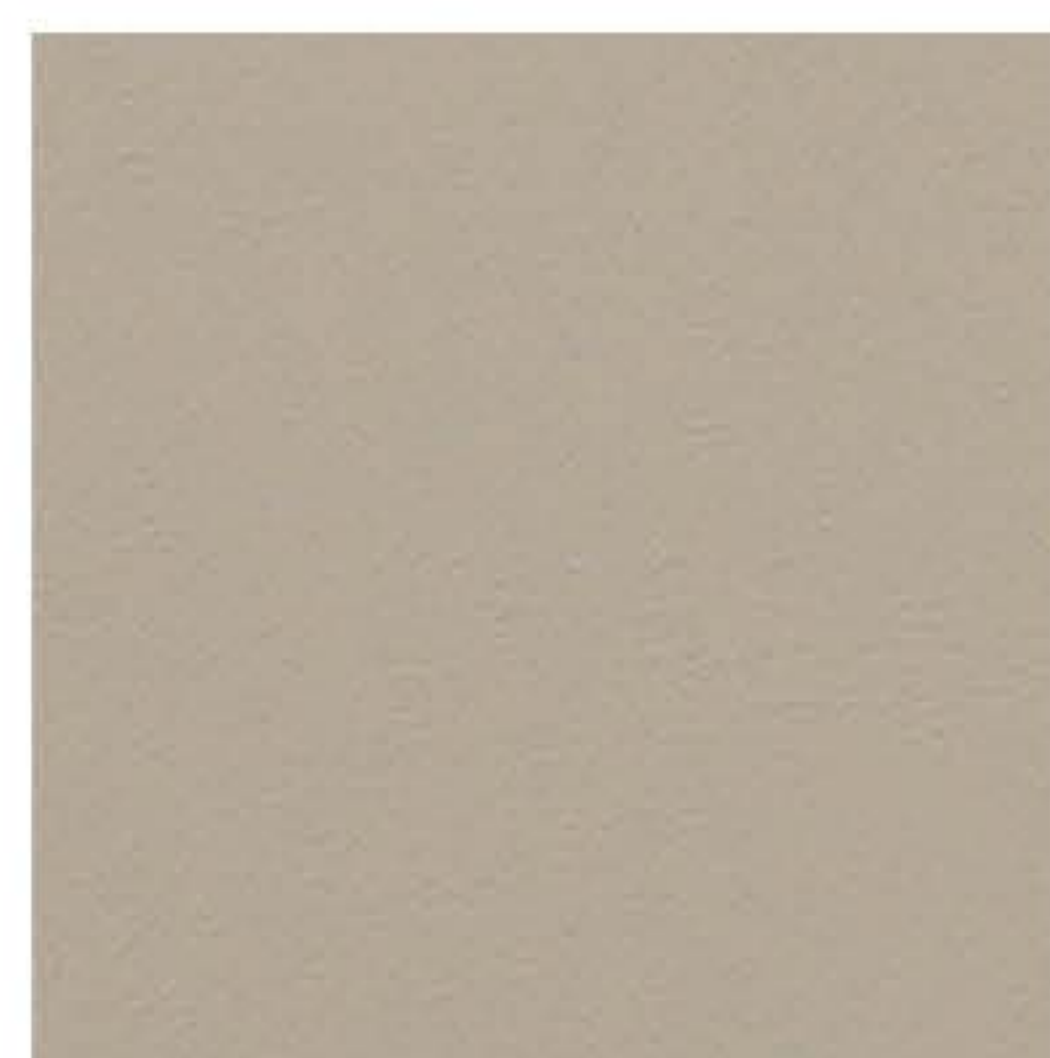

EN-07 13-0400 TPG  
French Oak



EN-016 15-1119 TPG  
Taos Taupe



EN-19 16-4402 TPG  
Drizzle



EN-20 16-1102 TPG  
Island Fossil




EN-21 16-1104 TPG  
Crockery



EN-22 17-1009 TPG  
Dune




EN-84 18-4015 TPG  
Mockingbird

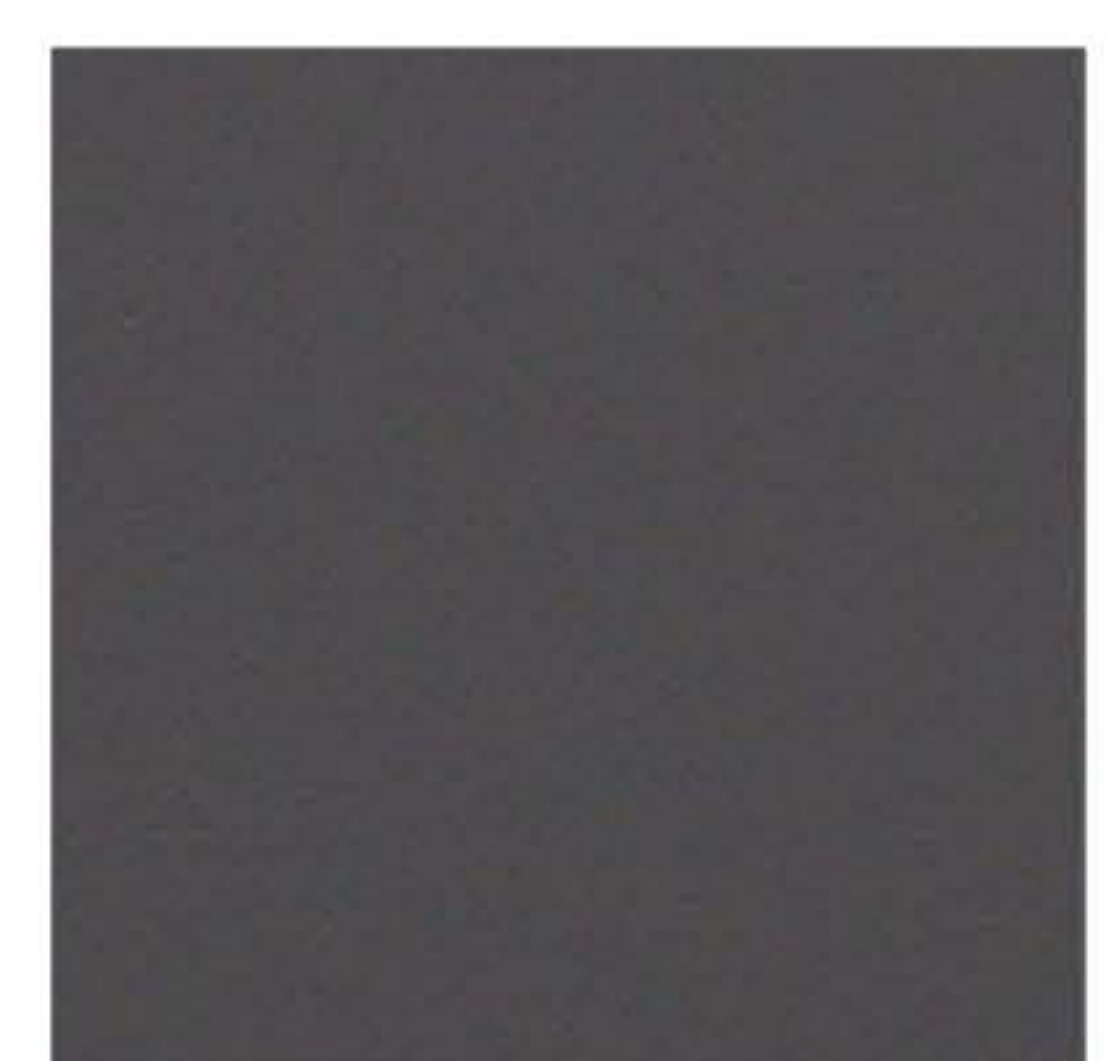

EN-47 18-5206 TPG  
Thunderstorm



EN-121 16-1518 TPG  
Rosette

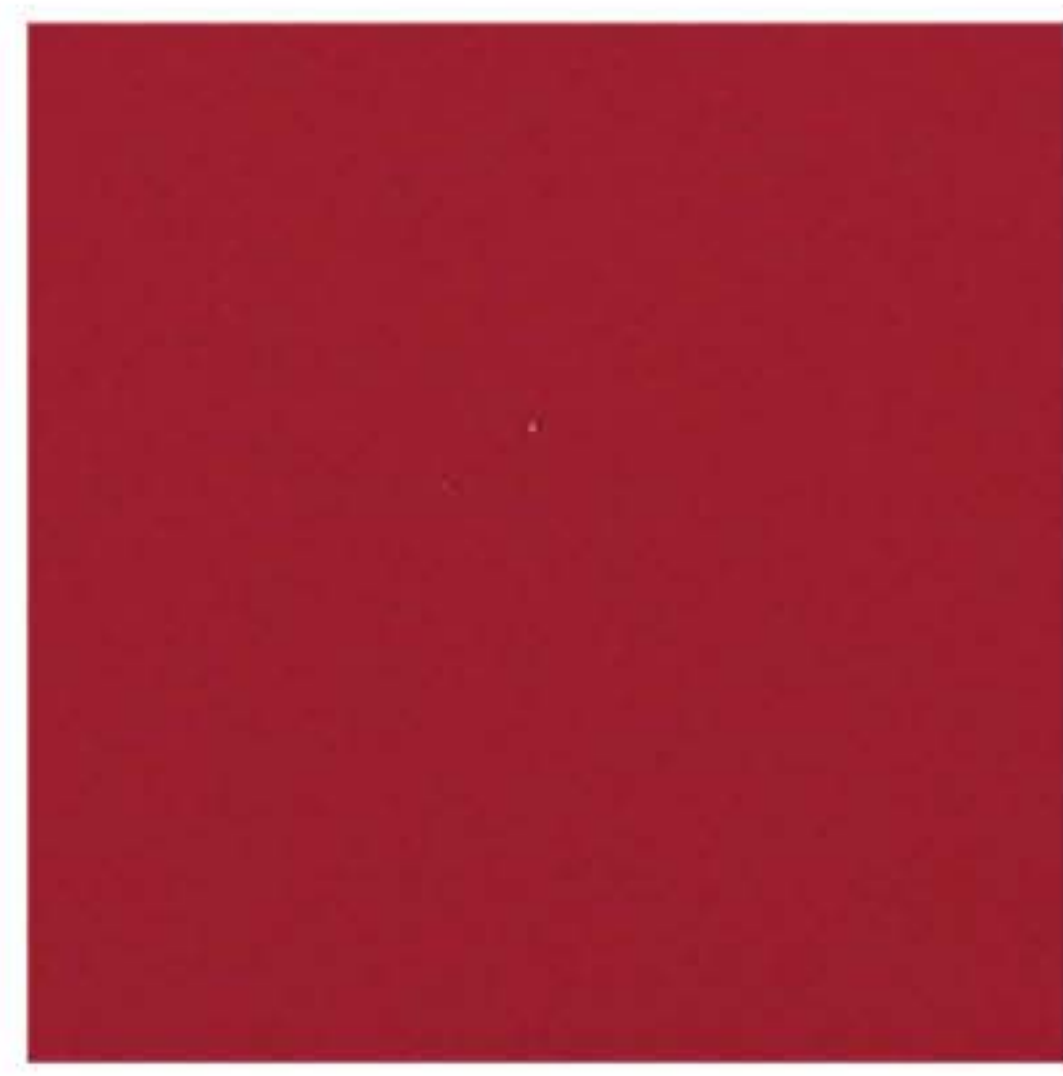

EN-38 19-1756 TPG  
Urban Red



EN-39 18-1658 TPG  
Pompeian Red




EN-112 19-1543 TPG  
Brick Red



EN-109 19-1533 TPG  
Cowhide



EN-115 16-1164 TPG  
Orange Pepper

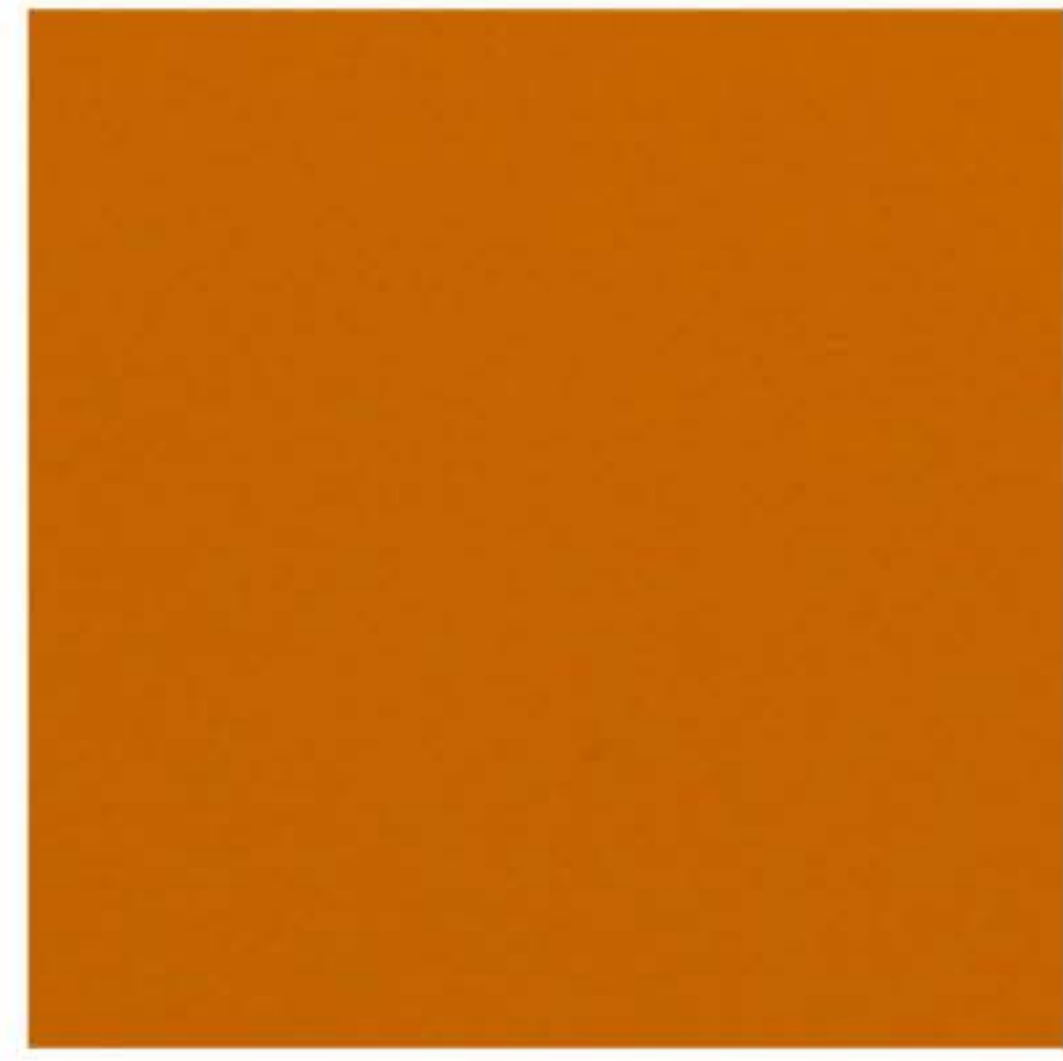


EN-26 16-1454 TPG  
Jaffa Orange



EN-88 15-1225 TPG  
Sand




EN-98 16-1142 TPG  
Golden Nugget

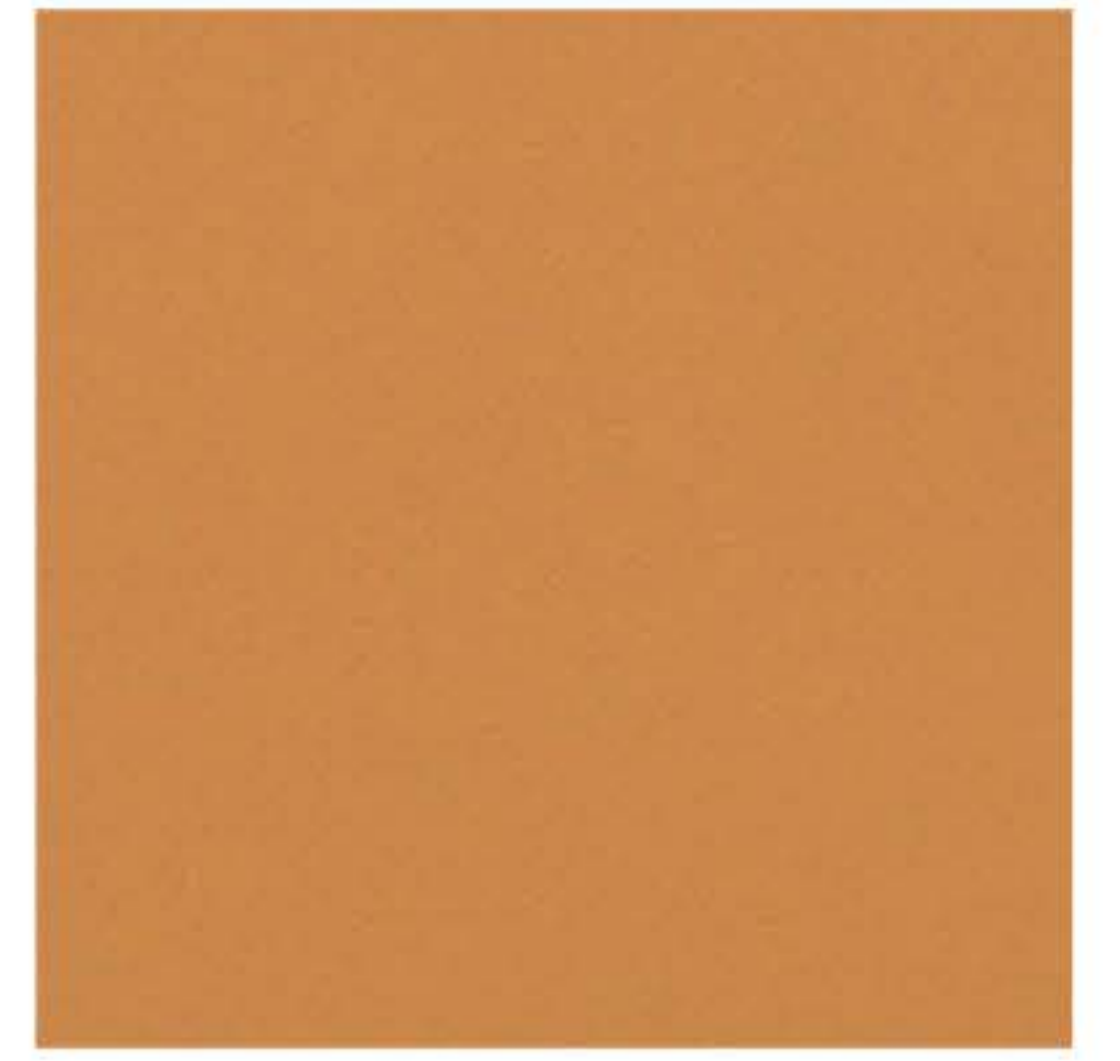

EN-24 16-1148 TPG  
Nugget




EN-92 16-1342 TPG  
Buckskin

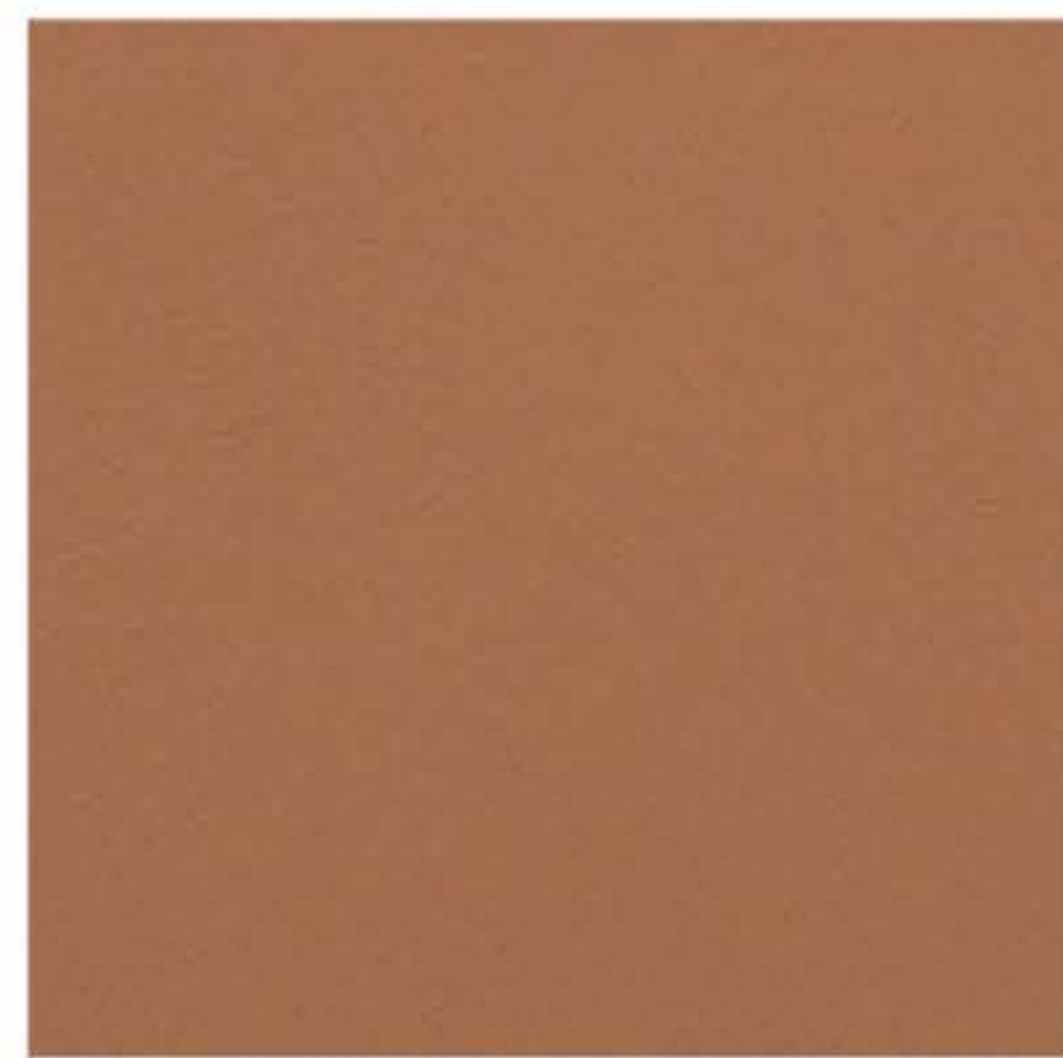

EN-97 17-1143 TPG  
Hazel



EN-25 17-1340 TPG  
Adobe

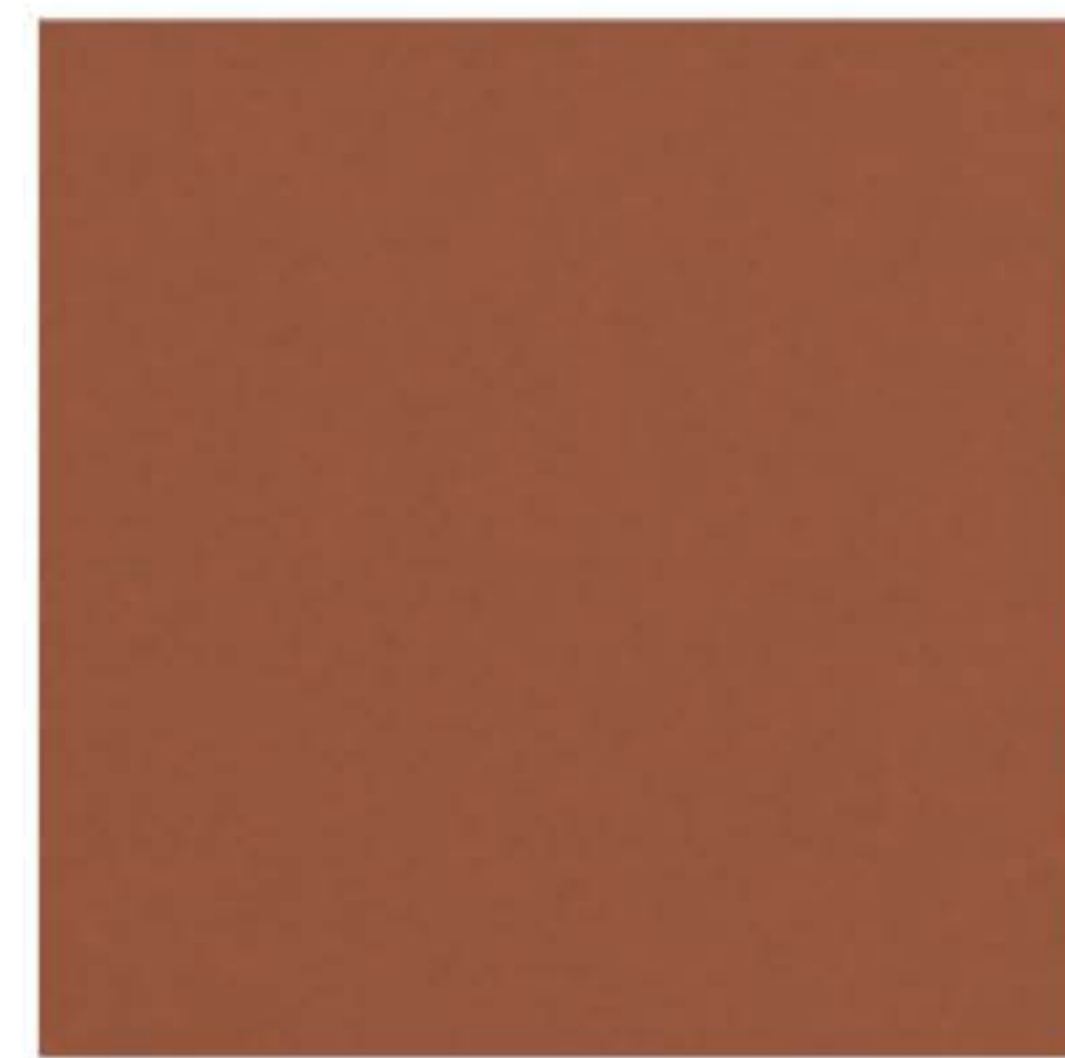

EN-27 16-1429 TPG  
Sunburn



EN-96 17-1336 TPG  
Bran



EN-93 17-1430 TPG  
Pecan Brown




EN-43 19-1216 TPG  
Chocolate Martini



EN-103 19-1012 TPG  
French Roast




EN-105 19-1218 TPG  
Potting Soil

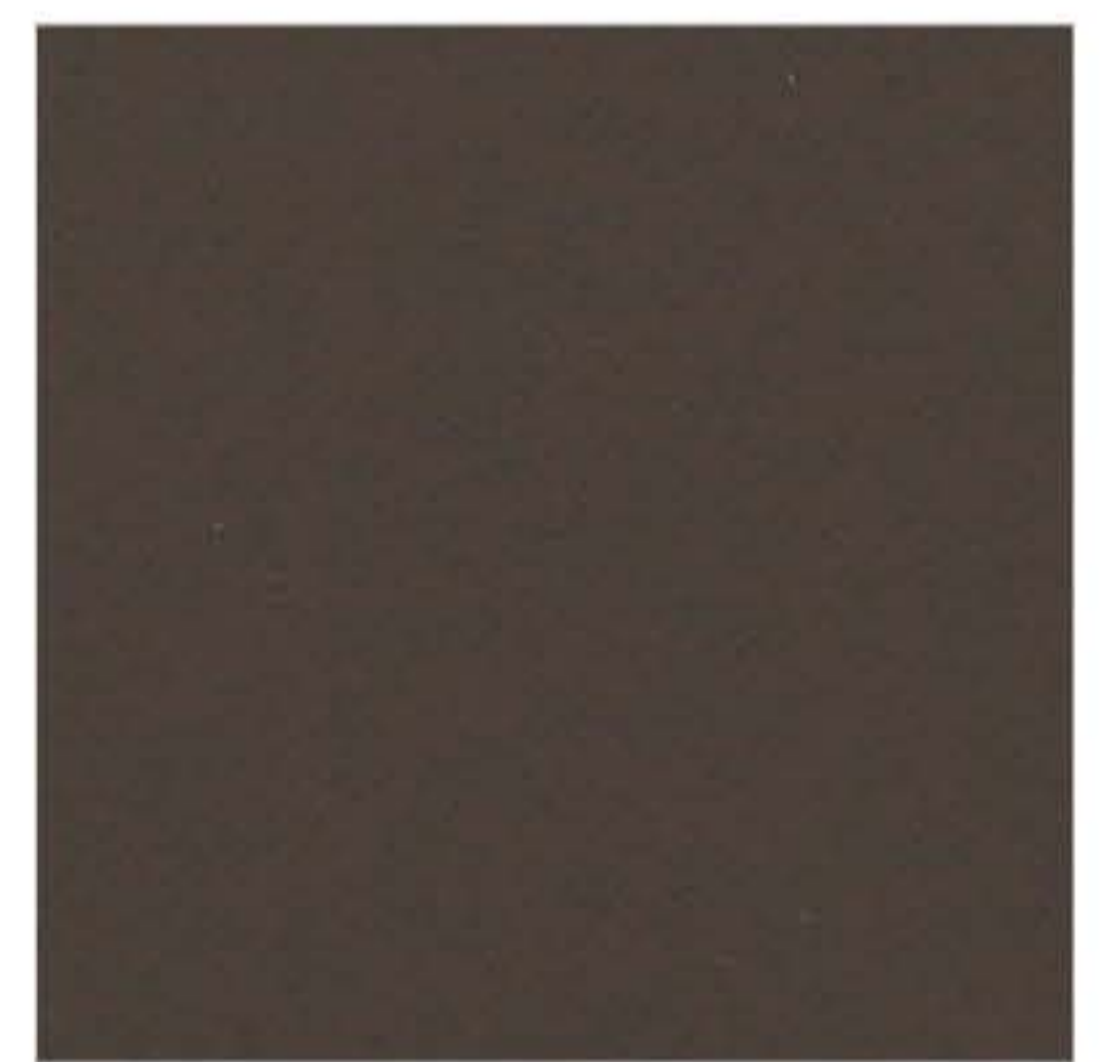

EN-100 19-1015 TPG  
Bracken



EN-29 19-4818 TPG  
Mallard Green

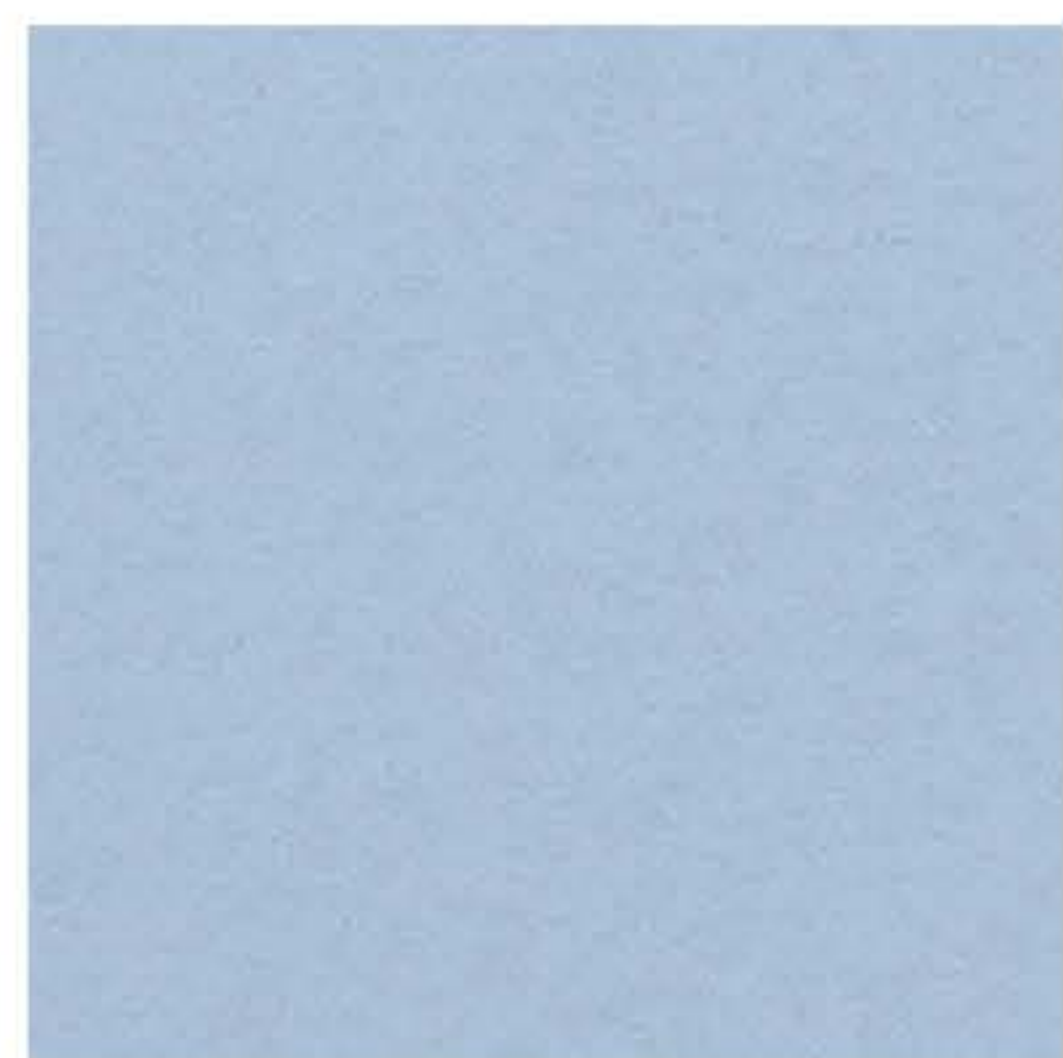


EN-138 13-4202 TPG  
Ice Water




EN-35 18-4221 TPG  
Spring Lake




EN-142 17-4021 TPG  
Faded Denim

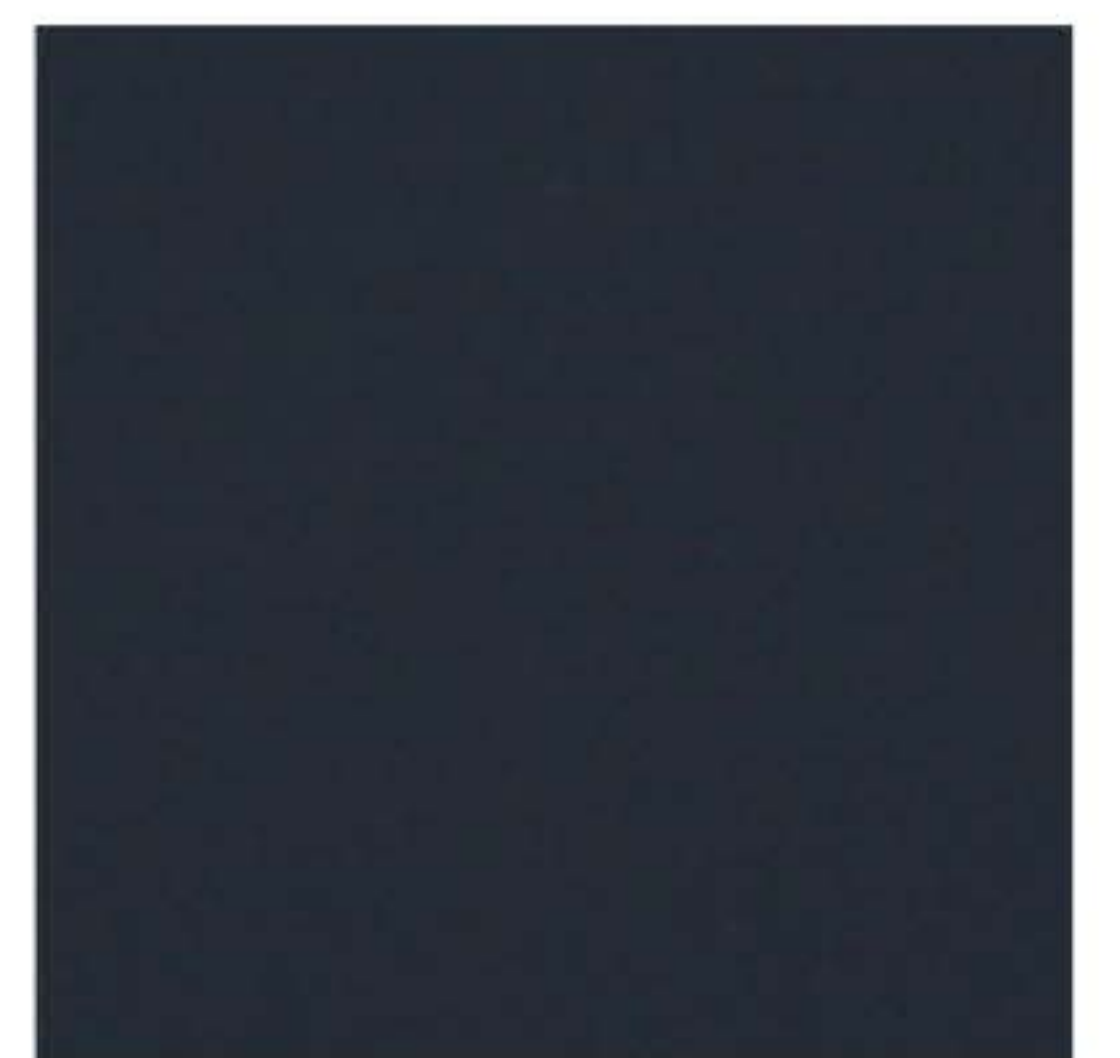

EN-45 19-4021 TPG  
Blueberry

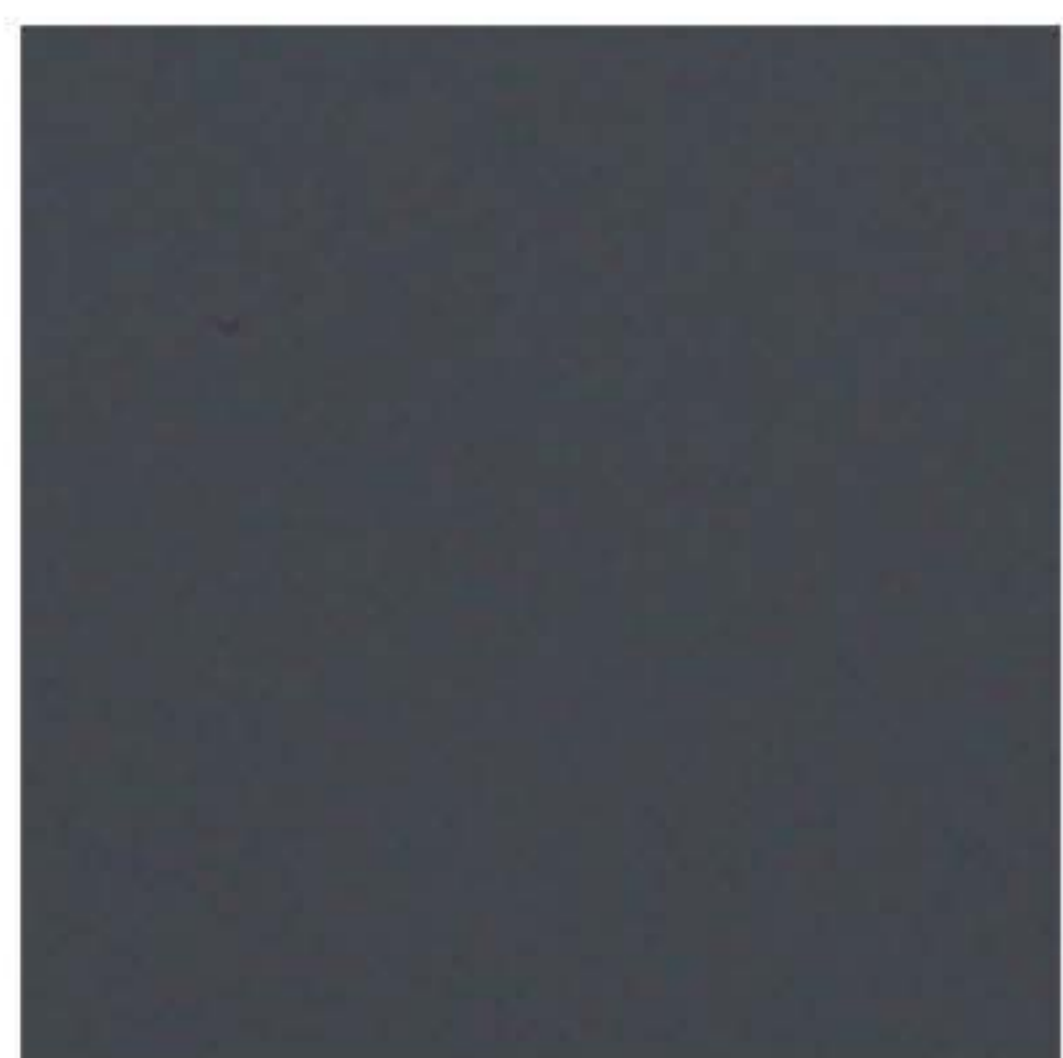


EN-49 19-4014 TPG  
Ombre Blue

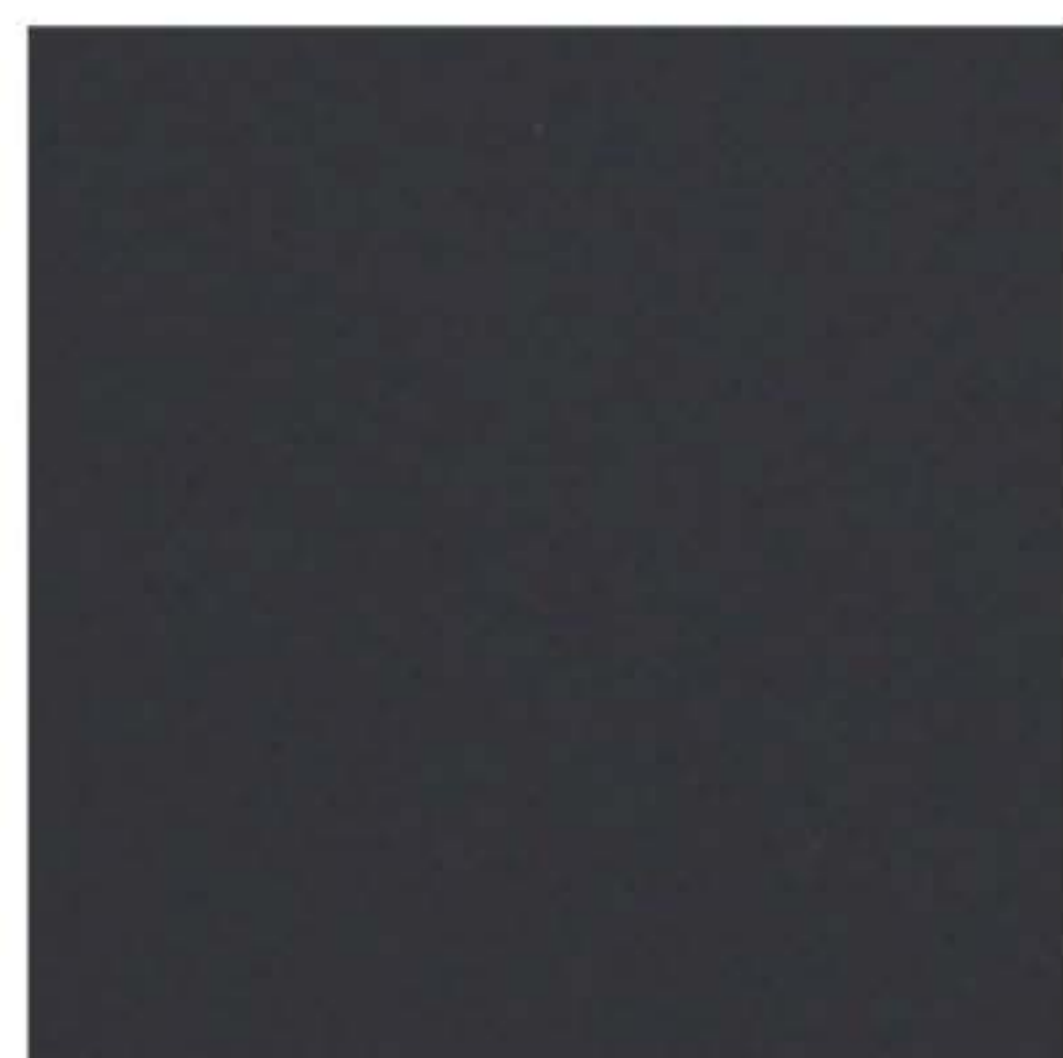


EN-50 19-4013 TPG  
Dark Navy



EN-48 19-3912 TPG  
Volcanic Ash

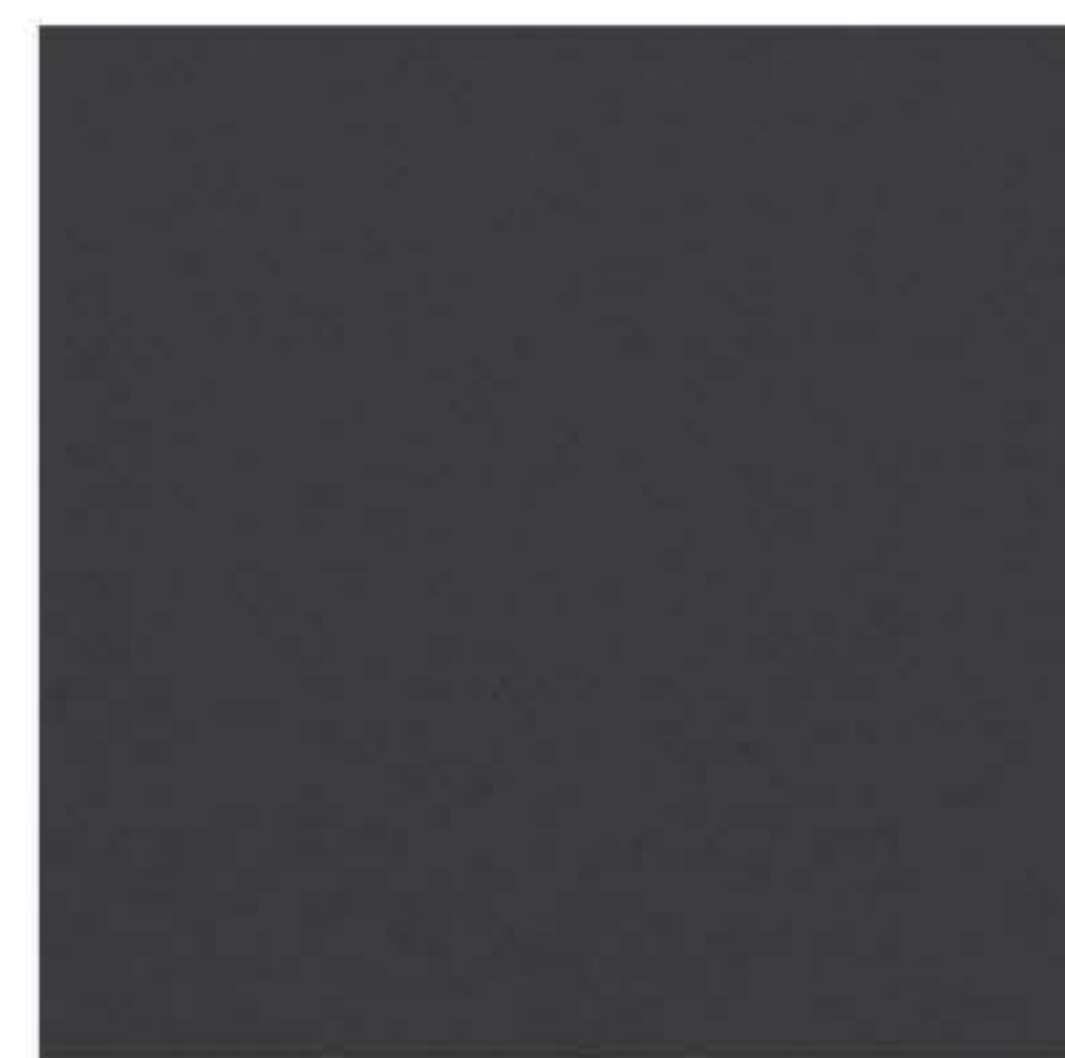

EN-162 19-0205 TPG  
Black Oyster

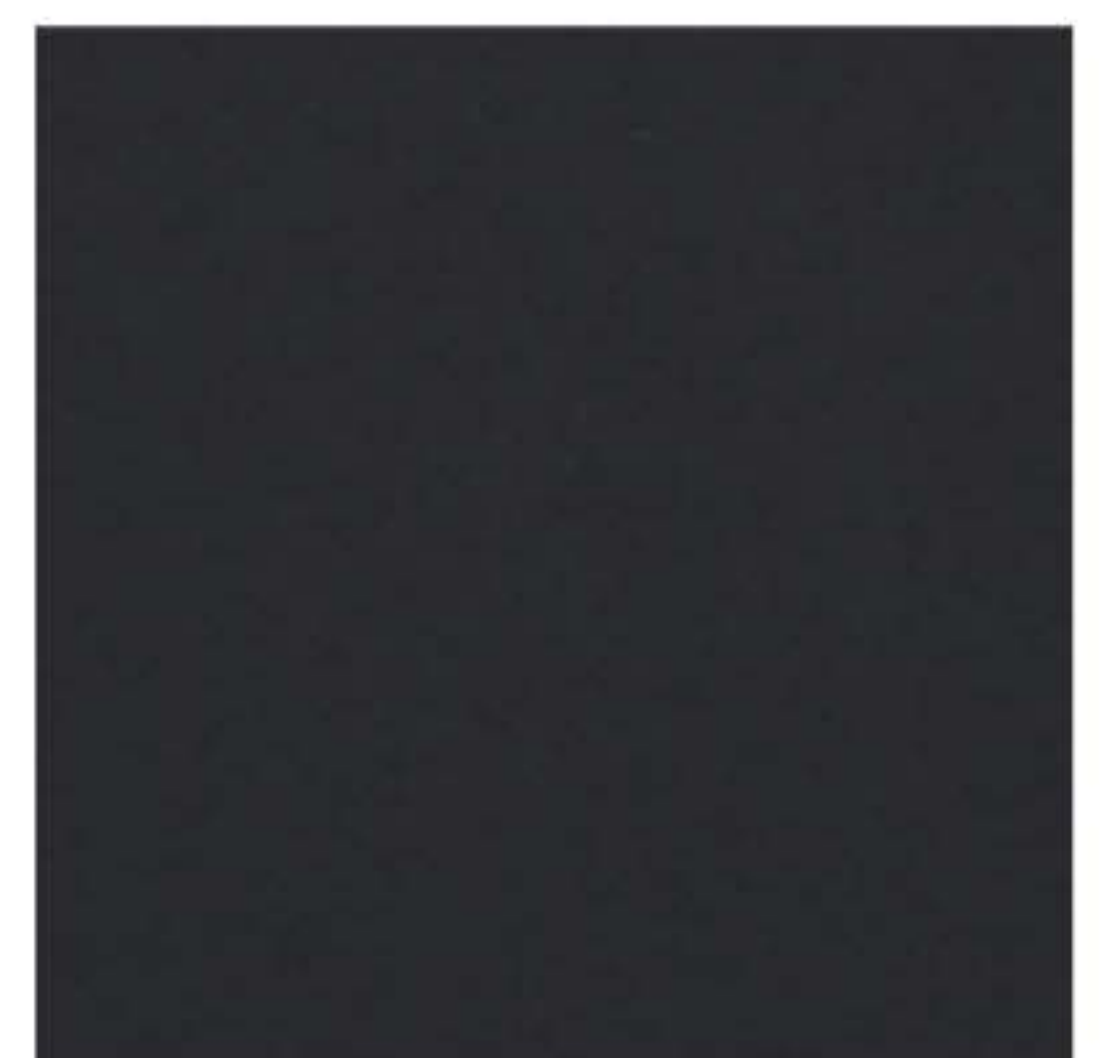

EN-51 19-3911 TPG  
Black Beauty

### Recommended Applications



Automotive



Upholstery



Marine Indoor



Hospitality



Healthcare

### Specification

Surface Composition	Polyurethane
Substrate Composition	Microfiber (50% Nylon + 50% PU)
Thickness	1.2 mm
Width	54" / 137cm
Weight	33 oz per linear yard / 750 gsm
Abrasion Resistance	Martindale 50,000+ cycles Commercial Heavy Duty
Colorfastness to Rubbing	ISO 105-X12:2001 Grey Scale 4-5
Cold Crack	-20°F CFFA-6 Federal Standard No.191A-Method 5874
Flame Retardancy	California Technical Bulletin 117
Warranty	Hydrolysis Resistance 5 Years

### Available In Stock

40 yards per roll for sale

